




INVOLUTE

Appropriate Technology since 1971

★ 3-Axes Autoladle

- ▶ Involute autoladle transfers molten Aluminium metal from a holding furnace to a high pressure Diecasting machine.
- ▶ It can be mounted on any make or size of Diecasting machine and works in autocycle with machine Without separate commands for its working.
- ▶ Autoladle is positioned on the operator side of the casting machine.
- ▶ Proper interfacing of the autoladle and the casting machine ensures that the autoladle positions itself over the shot hole of the machine ready to discharge the metal immediately on die closure.
- ▶ This autoladle is driven electrically and the metal is transferred from the furnace to the casting machine without any spillage.
- ▶ The angular speed of dipper and speed of dipper in vertical and horizontal directions, shot weight selection and timer values can be altered from the
- ▶ BITE (Built in test equipment) facility ensures the proper condition of metal level finding sensor circuit before each autocycle.
- ▶ The design is simple and ensures minimum maintenance and longer life.
- ▶ This autoladle can be used in a Gravity die casting setup also.

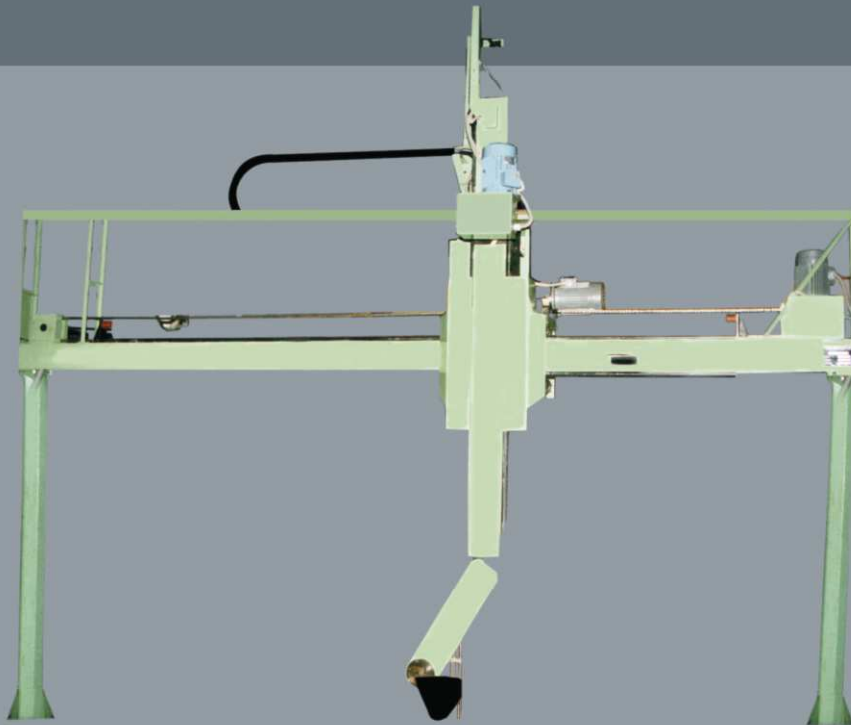

Specifications

Distance between pickup and pour points	2400 mm
Metal carrying capacity	15 kgs
Metal carrying consistency	±2%
Metal Level variations	400 mm
Control	PLC with Man Machine Interface



MANUFACTURED, SOLD & SERVICED BY
INVOLUTE AUTOMATION PRIVATE LIMITED
12, TIE, BALANAGAR, HYDERABAD - 500 037.
PH.NOS : 040 - 2307 9736, 2307 4000 TELEFAX : 2307 9294
E-MAIL : igw@rediffmail.com

★ **Patented Design**